



Master Track RV Heincke HE297

Data Processing Report

Contents

1	Introduction	1
2	Workflow	1
3	Sensor Layout	2
4	Processing Report	3

Contact:

Dr. Rainer Knust

Alfred Wegener Institute

Columbusstrasse, D-27568 Bremerhaven, GERMANY

Tel: +49(471)4831-1709

Fax: +49(471)4831-1918

Mail: Heincke-Coordination@awi.de

Processing Agency:

FIELAX

Gesellschaft für wissenschaftliche Datenverarbeitung mbH

Schleusenstr. 14, D-27568 Bremerhaven, GERMANY

Tel: +49 (0) 471 30015 0

Fax: +49 (0) 471 30015 22

Mail: info@fielax.de

Ref.: HE297_nav.pdf	Vers.: 1	Date: 2015/10/14	Status: final
---------------------	----------	------------------	---------------

1 Introduction

This report describes the processing of raw data acquired by position sensors on board RV Heincke during expedition HE297 to receive a validated master track which is used as reference of further expedition data.

2 Workflow

The different steps of processing and validation are visualized in figure 1. Unvalidated data of up to three sensors and ship-motion data are extracted from the DAVIS SHIP data base (<https://dship.awi.de>) in a 1-second interval. They are converted to ESRI point shapefiles and imported to ArcGIS. A visual screening is performed to evaluate data quality and remove outliers manually. The position data from each position sensor are centered to the destined master track origin by applying ship-motion data (angles of roll, pitch and heading) and lever arms. For all three resulting position tracks, a quality check is performed using a ship's speed filter and an acceleration filter. Filtered positions are flagged. In addition, a manual check is performed to flag obvious outliers. Those position tracks are combined to a single master track depending on a sensor priority list (by accuracy, reliability) and availability / applied exclusion of automatically or manually flagged of data. Missing data up to a time span of 60 seconds are linearly interpolated. To reduce the amount of points for overview maps the master track is generalized by using the Ramer-Douglas-Peucker algorithm. This algorithm returns only the most significant points from the track. Full master track and generalized master track are written to text files and imported to PANGAEA (<http://www.pangaea.de>) for publication.

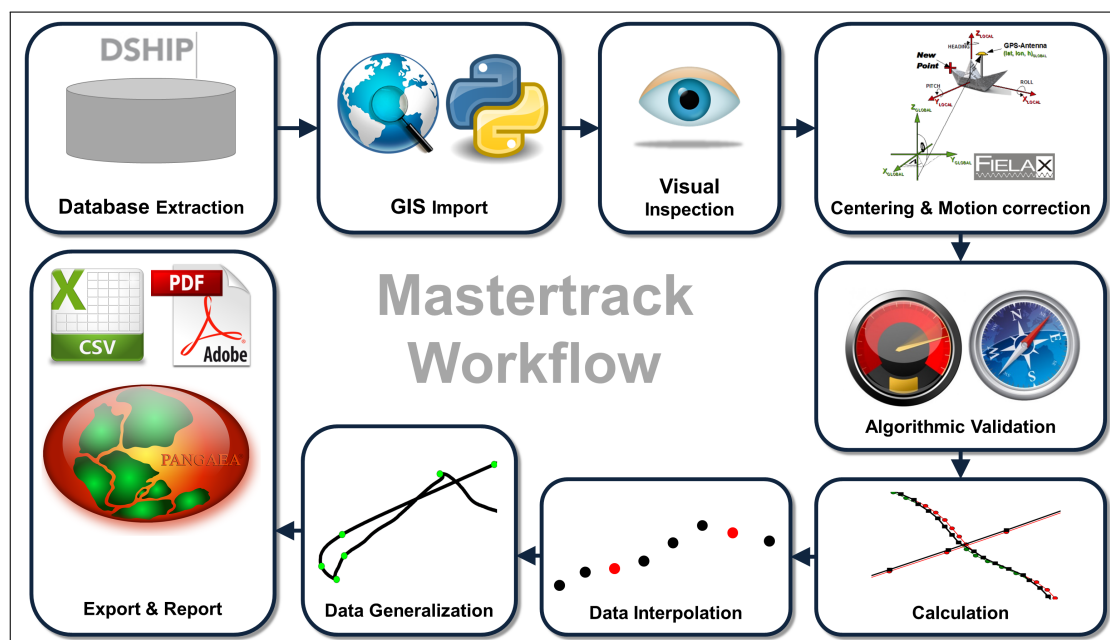


Figure 1: Workflow of master track data processing

3 Sensor Layout

This chapter describes the position sensors mounted during this cruise.

Cruise details

Vessel name	RV Heincke
Cruise name	HE297
Cruise start	27.10.2008 Bremerhaven
Cruise end	04.11.2008 Bremerhaven
Cruise duration	9 days
Master track reference point:	Resulting master track is referenced to <i>PHINS installation point</i> .

Position sensors

Sensor name	IXSEA PHINS III , short: PHINS		
Description	Inertial navigation system with reference positions from Trimble DGPS		
Accuracy	± 0.5 -3.0 m		
Installation point	Electrician's workshop, close to COG		
Installation offset	Offset from master track reference point to sensor installation point		
	X Positive to bow	0.000 m	
	Y Positive to starboard	0.000 m	
	Z Positive upwards	0.000 m	

Sensor name	Trimble Marine SPS461 , short: Trimble		
Description	DGPS-Receiver, correction type DGPS RTCM 2.x, correction source DGPS Base via radio		
Accuracy	Horizontal: ± 0.25 m + 1 ppm & Vertical: ± 0.50 m + 1 ppm		
Installation point	Masttop		
Installation offset	Offset from master track reference point to sensor installation point		
	X Positive to bow	5.298 m	
	Y Positive to starboard	-0.034 m	
	Z Positive upwards	22.297 m	

Sensor name	DEBEG/Leica MX400 , short: DEBEG		
Description	GPS-Receiver for navigation purposes		
Accuracy	± 7 -15 m		
Installation point	Observational Deck, fore rail		
Installation offset	Offset from master track reference point to sensor installation point		
	X Positive to bow	12.985 m	
	Y Positive to starboard	2.958 m	
	Z Positive upwards	11.328 m	

Motion sensor

Sensor name	IXSEA PHINS III, short: PHINS
Description	Inertial navigation system with reference positions from Trimble DGPS
Accuracy	± 0.01 roll, ± 0.01 pitch, ± 0.05 heading (deg)
Installation point	Electrician's workshop, close to COG

4 Processing Report

Database Extraction

Data source	DSHIP database (dship.awi.de)
Exported values	777541
First dataset	2008-10-27T00:00:00 UTC
Last dataset	2008-11-04T23:59:00 UTC

Centering & Motion Compensation

Each position track has been centered to the *PHINS installation point* by applying the correspondent motion angles for heading, roll and pitch as well as the installation offsets from chapter 2. The motion data were acquired by IXSEA PHINS III.

Automatic Validation

The following thresholds were applied for the automatic flagging of the position data:

Speed	Maximum 20 kn between two datapoints.
Acceleration	Maximum 1 m/s^2 between two datapoints.
Change of course	Maximum 5° between two datapoints.

Manual Validation

Obvious outliers were removed manually. For details see Processing Logbook of RV "Heincke" (<hdl:10013/epic.45841>).

Flagging result

	PHINS		Trimble		DEBEG	
Missing	0	0.000%	20431	2.628%	103	0.013%
Speed	0	0.000%	47485	6.107%	2172	0.279%
Acceleration	0	0.000%	47895	6.160%	11594	1.491%
Course	0	0.000%	425714	54.751%	358275	46.078%
Manually	0	0.000%	3131	0.403%	834	0.107%

Master Track Generation

The master track is derived from the position sensors' data selected by priority.

Sensor priority used:

1. DEBEG
2. Trimble
3. not used

Filters applied: manual, speed.

Distribution of position sensor data in master track:

Sensor	Data points	Percentage
Total	777541	100.000 %
PHINS	0	0.000 %
Trimble	2674	0.344 %
DEBEG	774547	99.615 %
Interpolated	320	0.041 %
Gaps	0	0.000 %

Remarks

None

Score

For each cruise, a score is calculated ranging from 0 (no data) to 100 (only very good data). the score for the cruise HE297 is 95.

Generalization

The master track is generalized to receive a reduced set of the most significant positions of the track using the Ramer-Douglas-Peucker algorithm and allow a maximum tolerated distance between points and generalized line of 4 arcseconds.

Results:

Number of generalized points	600 points
Data reduction	99.9228 %

Result files

Report in XML format:

The XML contains all information of the master track generation in a machine-readable format. In addition a XSD schema file is provided.

Master track text file:

The format is a plain text (tab-delimited values) file with one data row in 1 second interval.

Column separator	Tabulator "\t"	
Column 1	Date and time expressed according to ISO 8601	
Column 3	Latitude in decimal format, unit degree	
Column 4	Longitude in decimal format, unit degree	
Column 5	Flag for data source	
	1	PHINS
	2	Trimble
	3	DEBEG
	INTERP	Interpolated point
	GAP	Missing data

Text file of the generalized master track:

The format is a plain text (tab-delimited values) file.

Column separator	Tabulator "\t"	
Column 1	Date and time expressed according to ISO 8601	
Column 2	Latitude in decimal format, unit degree	
Column 3	Longitude in decimal format, unit degree	

Processing Report:

This PDF document.

Cruise map

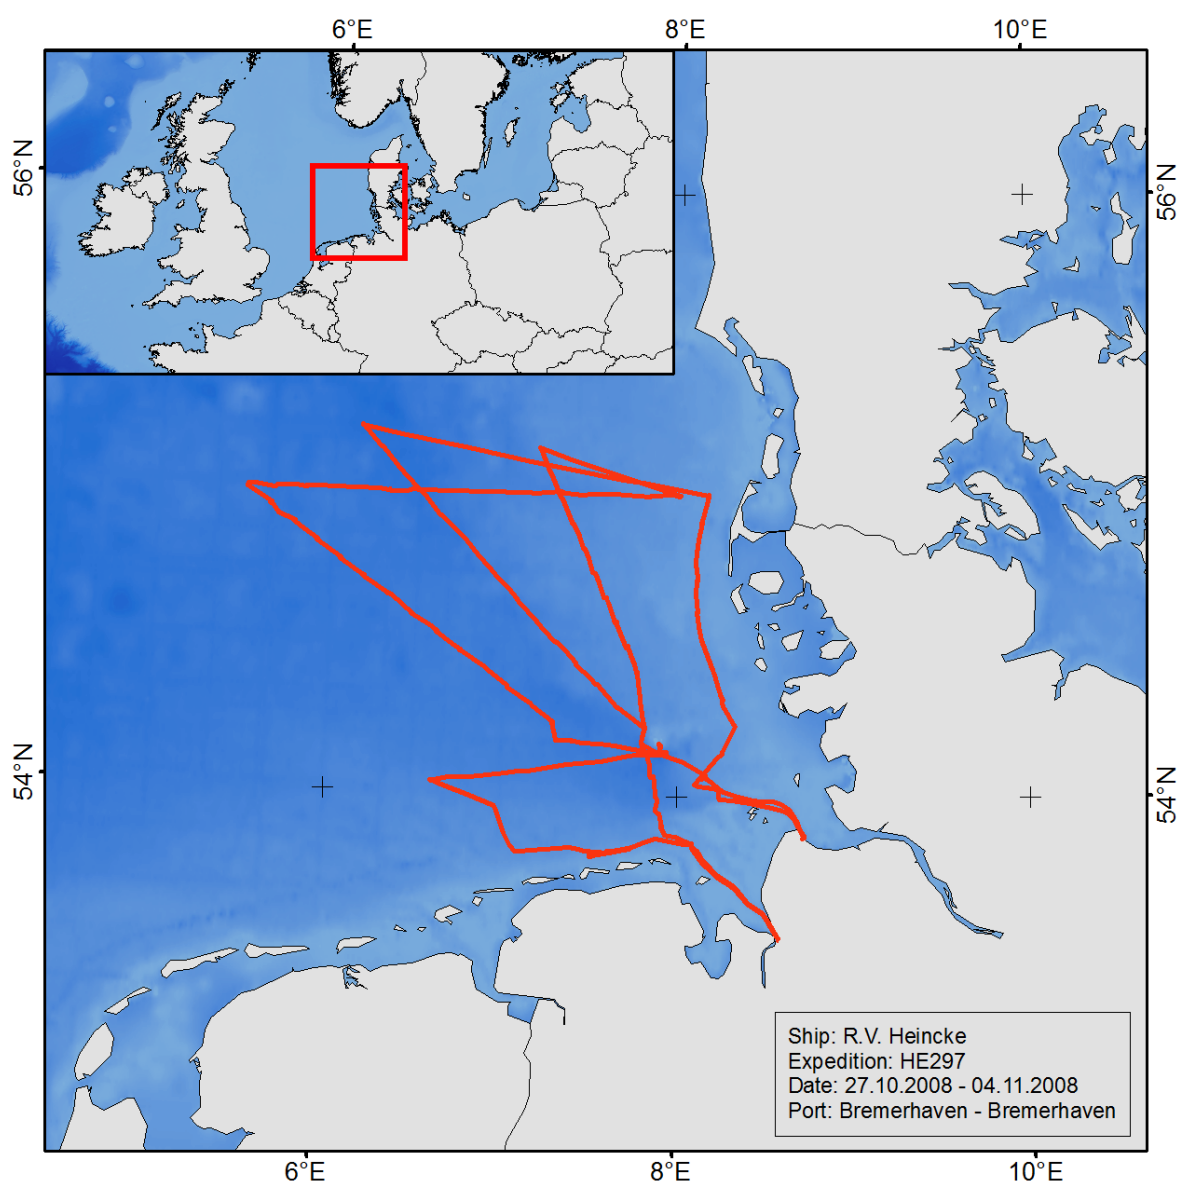


Figure 2: Map of the generalized master track